

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁵ : C08L 51/06, 23/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/25526 (43) International Publication Date: 10 November 1994 (10.11.94)</p>
<p>(21) International Application Number: PCT/US94/04512 (22) International Filing Date: 25 April 1994 (25.04.94) (30) Priority Data: 08/054,376 28 April 1993 (28.04.93) US (71) Applicant: THE DOW CHEMICAL COMPANY [US/US]; 2030 Dow Center, Abbott Road, Midland, MI 48640 (US). (72) Inventors: HUGHES, Morgan, M.; 708 Milton, Angleton, TX 77515 (US). KUMMER, Kyle, G.; 226 Plum Circle, Lake Jackson, TX 77566 (US). BETSO, Stephen, R.; Bergstrasse 14, CH-8810 Horgen (CH). ROWLAND, Michael, E.; 402 Daffodil, Lake Jackson, TX 77566 (US). EDMONDSON, Morris, S.; Route 7, 130 Mohawk Drive, Alvin, TX 77511 (US). (74) Agent: WARRICK, Noreen, D.; The Dow Chemical Company, Patent Dept., Building B-1211, 2301 North Brazosport Boulevard, Freeport, TX 77541 (US).</p>	<p>(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, UA, UZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: BLENDS OF GRAFT-MODIFIED SUBSTANTIALLY LINEAR ETHYLENE POLYMERS AND OTHER THERMOPLASTIC POLYMERS

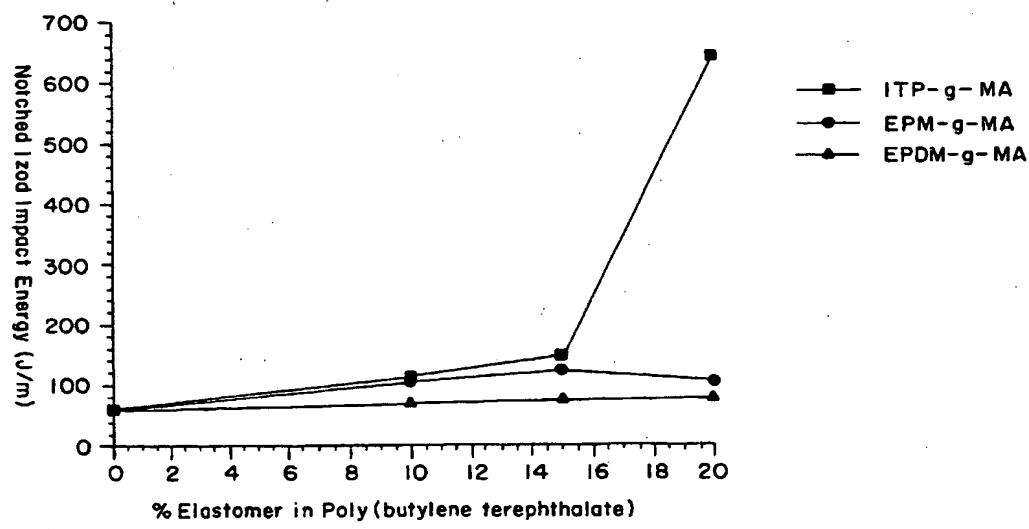

(57) Abstract

Blends of substantially linear ethylene polymers, for example, polyethylenes prepared by constrained geometry catalysis, which are grafted with one or more olefinically unsaturated organic compounds, for example, maleic anhydride, and another thermoplastic polymer, for example, a polyester or a polyamide demonstrate desirable impact properties at both ambient and low temperatures (for example, -30 °C).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

**BLENDS OF GRAFT-MODIFIED SUBSTANTIALLY LINEAR
ETHYLENE POLYMERS AND OTHER THERMOPLASTIC POLYMERS**

5 This invention relates to elastic, substantially linear ethylene
polymers. In one aspect, this invention relates to such polymers
grafted with an unsaturated organic compound, for example, maleic
anhydride, while in another aspect, the invention relates to blends of
this grafted polymer with one or more other thermoplastic polymers,
for example, a polyester or a polyamide. In still another aspect,
10 this invention relates to such blends in combination with a filler.
In yet another aspect, this invention relates to such blends further
comprising one or more other olefin polymers, either grafted or
ungrafted.

15 The art is replete with concern for improving the toughness
(also known as ductility) of various thermoplastic resins, for
example, polyesters, polyamides. The toughness or ductility of a
thermoplastic resin is typically measured by use of the notched IZOD
impact test (ASTM D-256). However, the art typically discusses
thermoplastic toughness in the context of ambient temperature with
20 little, if any, recognition of the desirability of thermoplastic
toughness in many applications at low temperature (less than 0 C).
Moreover, not only do most commercially available thermoplastic resins
have less than desirable impact resistance at low temperatures, but
most also have less than desirable optical and other physical
25 properties.

The graft modification of polyolefins, such as polyethylene and
polypropylene, with various unsaturated monomers is also well known in
the art. Such a modification renders an essentially nonpolar material
compatible, at least to some limited extent, with a polar material.
30 This, in turn, impacts on certain of the properties of the polyolefin,
for example, its ability to adhere or laminate to a solid. For
example, USP 4,198,327 teaches a modified crystalline polyolefin
composition having improved adhesion to polar solid materials. USP
4,397,916 and 5,055,526 also teach adhesive resin compositions of
35 modified polyolefins and laminates made from such polyolefins.

As these references suggest, much of the existing art is
primarily concerned with the modification of these polyolefins to

develop compositions having specific adhesive properties or improvements in adhesive properties. However, not only do these references discuss lightly or not at all the possible advantageous influence that these graft-modified resin can have on these compositions, but some note that these resins can actually have a detrimental influence on one or more properties of the polyolefin and/or the composition. For example, USP 4,134,927; 3,884,882 and 5,140,074 all report undesirable changes in the rheological properties due to crosslinking of the modified material. These changes ultimately impact the processibility of the material and thus, its utility in commercial applications.

The subject invention is directed to, thermoplastic compositions characterized as a substantially homogeneous blend of at least one thermoplastic polymer and at least one substantially linear ethylene polymer grafted with at least 0.01 wt %, based on the weight of the grafted ethylene polymer, of an unsaturated organic compound containing at least one site of ethylenic unsaturation and at least one carboxyl group, the ethylene polymer characterized as having:

- (i) a melt flow ratio, $I_{10}/I_2 \geq 5.63$;
- (ii) a molecular weight distribution, M_w/M_n , defined by the equation: $M_w/M_n \leq (I_{10}/I_2) - 4.63$;
- (iii) a density greater than 0.850 g/cm^3 ; and
- (iv) a critical shear rate at onset of surface melt fracture of at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having the same I_2 and M_w/M_n .

The inventive compositions demonstrate desirable impact resistance at both ambient and low temperatures as well as desirable optical properties and small particle sizes relative to known polymers. The thermoplastic compositions of this invention can be either filled or unfilled. In one embodiment of the invention, these compositions can further comprise one or more other polyolefins, either grafted or ungrafted.

Figure 1 reports comparative notched IZOD impact energy data at ambient temperature for PBT and various blends of PBT with MAH-g-ITP, maleic anhydride grafted ethylene-propylene rubber

(MAH-g-EPR), and maleic anhydride grafted ethylene-propylene-diene monomer (MAH-g-EPDM), respectively.

Figure 2 reports comparative Dynatup impact energy data at -20 F (-28.8 C) for PBT and the same blends as identified in Figure 3.

5 Figure 3 reports comparative notched IZOD impact energy data at ambient temperature for poly(butylene terephthalate) (PBT) and various blends of PBT with a maleic anhydride grafted substantially linear ethylene polymer (MAH-g-ITP) and a maleic anhydride grated Tafmer™ resin (MAH-g-Tafmer).

10 DESCRIPTION OF THE PREFERRED EMBODIMENTS

The substantially linear ethylene polymers used in the practice of this invention are known, and they and their method of preparation are fully described in USP 5,272,236 and USP 5,278,272. As here used, "substantially linear" means that the polymer backbone is substituted
15 with from 0.01 long-chain branches/1000 carbons to 3 long-chain branches/1000 carbons, preferably from 0.01 long-chain branches/1000 carbons to 1 long-chain branch/1000 carbons, more preferably from 0.05 long-chain branches/1000 carbons to 1 long-chain branch/1000 carbons. Long-chain branching is here defined as a chain length of at least
20 about 6 carbon atoms, above which the length cannot be distinguished using ¹³C nuclear magnetic resonance spectroscopy. However, the long-chain branch can be about the same length as the length of the polymer backbone.

These unique polymers (subsequently referred to as "CGC polymers") are prepared by using constrained geometry catalysts (CGC),
25 and are characterized by a narrow molecular weight distribution and if an interpolymer, by a narrow comonomer distribution. As here used, "interpolymer" means a polymer of two or more comonomers, for example, a copolymer, terpolymer, etc., or in other words, a polymer made by
30 polymerizing ethylene with at least one other comonomer. Other basic characteristics of these CGC polymers include a low residuals content (that is, low concentrations in the CGC polymer of the catalyst used to prepare the polymer, unreacted comonomers, and low molecular weight oligomers made during the course of the polymerization), and a
35 controlled molecular architecture which provides good processability even though the molecular weight distribution is narrow relative to

conventional olefin polymers.

While the CGC polymers used in the practice of this invention include elastic, substantially linear ethylene homopolymers, preferably the CGC polymers used in the practice of this invention
5 comprise from 95 to 50 weight percent (wt %) ethylene, and from 5 to 50 wt % of at least one α -olefin comonomer, more preferably 10 to 25 wt % of at least one α -olefin comonomer. Typically, the CGC polymers are copolymers of ethylene and an α -olefin of from 3 to 20 carbon
10 atoms (for example, propylene, 1-butene, 1-hexene, 4-methyl-1-pentene, 1-heptene, 1-octene, styrene, etc.), preferably of from 3 to 10 carbon atoms. More preferably these polymers are a copolymer of ethylene and 1-octene. The density of these CGC polymers is typically from 0.850 to 0.935 grams per cubic centimeter (g/cm^3), preferably from 0.870 to 0.910 g/cm^3 . The melt flow ratio, measured as I_{10}/I_2 (ASTM D-1238),
15 is greater than or equal to 5.63, and is preferably from 6.5 to 15, more preferably from 7 to 10. The molecular weight distribution (M_w/M_n), measured by gel permeation chromatography (GPC), is defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63,$$

20 and is preferably from 1.8 to 2.5. For substantially linear ethylene polymers, the I_{10}/I_2 ratio indicates the degree of long-chain branching, that is the larger the I_{10}/I_2 ratio, the more long-chain branching in the polymer.

According to Ramamurthy in Journal of Rheology, 30(2), 337-357,
25 1986, above a certain critical flow rate, surface melt fracture may occur, which may result in irregularities ranging from loss of specular gloss to the more severe form of "sharkskin". As used herein, the onset of surface melt fracture is characterized as the beginning of losing extrudate gloss at which the surface roughness of
30 extrudate can only be detected by 40x magnification. The substantially linear ethylene polymers will further be characterized by a critical shear rate at the onset of surface melt fracture which is at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having about the same I_2 and
35 M_w/M_n .

The unique characteristic of the homogeneously branched,

substantially linear ethylene polymers is a highly unexpected flow property where the I_{10}/I_2 value of the polymer is essentially independent of the polydispersity index (that is, M_w/M_n) of the polymer. This is contrasted with conventional linear homogeneously branched and linear heterogeneously branched polyethylene resins having rheological properties such that to increase the I_{10}/I_2 value the polydispersity index must also be increased.

The preferred melt index, measured as I_2 (ASTM D-1238, condition 190/2.16 (formerly condition E)), is from 0.5 g/10 min to 200 g/10 min, more preferably from 1 to 20 g/10 min. Typically, the preferred CGC polymers used in the practice of this invention are homogeneously branched and do not have any measurable high density fraction, that is, short chain branching distribution as measured by Temperature Rising Elution Fractionation which is described in USP 5,089,321.

Stated in another manner, these polymers preferably do not contain any polymer fraction that has a degree of branching less than or equal to 2 methyls/1000 carbons. These preferred CGC polymers also usually exhibit a single differential scanning calorimetry (DSC) melting peak.

Any unsaturated organic compound containing at least one site of ethylenic unsaturation (for example, at least one double bond), at least one carboxyl group (-COOH), and that will graft to a CGC polymer as described above can be used in the practice of this invention. As here used, "carboxyl group" includes carboxyl groups per se and derivatives of carboxyl groups such as anhydrides, esters and salts (both metallic and nonmetallic). Preferably, the organic compound contains a site of ethylenic unsaturation conjugated with a carboxyl group. Representative compounds include maleic, acrylic, methacrylic, itaconic, crotonic, α -methyl crotonic, and cinnamic acid and their anhydride, ester and salt derivatives, and fumaric acid and its ester and salt derivatives. Maleic anhydride is the preferred unsaturated organic compound containing at least one ethylenic unsaturation and at least one carboxyl group.

The unsaturated organic compound content of the grafted CGC polymer is preferably at least 0.01 wt %, and more preferably at least 0.05 wt %, based on the combined weight of the polymer and the organic compound. The maximum amount of unsaturated organic compound content

can vary to convenience, but typically it does not exceed 10 wt %, preferably it does not exceed 5 wt %, and more preferably it does not exceed 2 wt % of the grafted CGC polymer.

5 The unsaturated organic compound can be grafted to the CGC polymer by any known technique, such as those taught in USP 3,236,917 and USP 5,194,509. For example, in the '917 patent the polymer is introduced into a two-roll mixer and mixed at a temperature of 60 C. The unsaturated organic compound is then added along with a free radical initiator, such as, for example, benzoyl peroxide, and the
10 components are mixed at 30 C until the grafting is completed. In the '509 patent, the procedure is similar except that the reaction temperature is higher, for example, 210 to 300 C, and a free radical initiator is not used or is used at a reduced concentration.

15 An alternative and preferred method of grafting is taught in USP 4,950,541, by using a twin-screw devolatilizing extruder as the mixing apparatus. The CGC polymer and unsaturated organic compound are mixed and reacted within the extruder at temperatures at which the reactants are molten and in the presence of a free radical initiator. Preferably, the unsaturated organic compound is injected into a zone
20 maintained under pressure within the extruder.

In one embodiment, the graft-modified CGC polymers act as compatibilizers for the filled compositions of this invention. Many molded and extruded products contain fillers, for example, silica, talc, glass, clay, carbon black, and the like, for strength and/or
25 some other desirable property. Often these fillers are only marginally compatible with the resinous matrix within which they are incorporated and as such, the amount of filler that can be incorporated into the matrix, that is, the loading level, is limited. Compatibilizers are used to coat or otherwise treat the filler to render it more
30 compatible with the matrix, and thus allow a higher loading than otherwise possible to be achieved. The graft-modified substantially linear ethylene polymers used in this invention are particularly desirable compatibilizers because higher loading levels can be achieved, that is either more filler can be incorporated into a given
35 resin matrix based on the amount of compatibilizer, or less compatibilizer is required to incorporate the same amount of filler.

In addition, the compatibilizers of this invention impart desirable properties to the composition in both fabricated and prefabricated form. In fabricated form, the strength and impact properties (both at ambient and low temperature) are enhanced relative to fabricated compositions devoid of grafted substantially linear ethylene polymer. In prefabricated form, the processability of the compositions are enhanced relative to compositions devoid of grafted substantially linear ethylene polymer.

The amount of graft-modified substantially linear ethylene polymer required to effectively serve as a compatibilizer will, of course, vary with the nature of the resinous matrix, the nature and amount of filler, and the chemical and physical characteristics of the substantially linear ethylene polymer and unsaturated organic compound containing a carboxyl group (and the extent of grafting). Typically, the weight ratio of graft-modified substantially linear ethylene polymer to filler is from 1:50 to about 50:1, preferably from 1:40 to 20:1.

The graft-modified substantially linear ethylene polymer is dry blended or melt blended with other thermoplastic polymers to make the substantially homogeneous compositions of this invention, and then these compositions are molded or extruded into a shaped article. As here used, "substantially homogeneous" means that the components of the composition are sufficiently mixed with one another such that the make-up of one portion of the composition is substantially the same as that of any other portion of the composition. Such other thermoplastic polymers include any polymer with which the grafted substantially linear ethylene polymer is compatible, and include both olefin and non-olefin polymers, grafted and ungrafted. The grafted substantially linear ethylene polymer can also be blended with another substantially linear ethylene polymer, a conventional heterogeneously branched or homogeneously branched linear ethylene polymer, a non-olefin polymer, any of which can be grafted or ungrafted, or any combination of these polymers. Examples of such polymers include high density polyethylene (HDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), ultra low density polyethylene (ULDPE), polypropylene, ethylene-propylene copolymer, ethylene-styrene

5 copolymer, polyisobutylene, ethylene-propylene-diene monomer (EPDM),
polystyrene, acrylonitrile-butadiene-styrene copolymer (ABS),
ethylene-acrylic acid (EAA), ethylene/vinyl acetate (EVA),
ethylene/vinyl alcohol (EVOH), polymers of ethylene and carbon
monoxide (ECO, including those described in USP 4,916,208), or
10 ethylene, propylene and carbon monoxide (EPCO) polymers, or of
ethylene, carbon monoxide and acrylic acid (ECOAA) polymers, and the
like. Representative of the non-olefin polymers are the polyesters,
polyvinyl chloride (PVC), epoxies, polyurethanes, polycarbonates,
15 polyamides, and the like. These blending polymers are characterized
by a compatibility with the grafted substantially linear ethylene
polymer such that the melt blend does not exhibit gross phase
separation, that is a separation in which the individual components of
the blend are visible to the unaided eye, after thorough blending and
20 during subsequent processing of the blend. If more than one of these
polymers is blended with one or more grafted substantially linear
ethylene polymers, then all usually exhibit sufficient compatibility
with each other, one-to-one or at least in combination with one or
more other polymers, such that the polymeric components do not exhibit
25 gross phase separation which could lead to extrusion processing
difficulties, such as extrudate surging, and film band-effects.

The amount of graft-modified substantially linear ethylene
polymer that is blended with one or more other polymers is dependent
upon many factors, including the nature of the other polymer or
25 polymers, the intended end use of the blend, and the presence or
absence and the nature of additives. For molded articles,
particularly engineered materials (for example, hoses, shrouds, etc.)
the grafted substantially linear ethylene polymer is blended with an
engineering plastic, for example, polyamide or polyester, such that
30 the blended composition typically comprises from 2 to 70 wt %, preferably
from 5 to 30 wt % of the graft modified substantially
linear ethylene polymer(s) on a total weight basis. In those
applications in which the grafted substantially linear ethylene
polymer is blended with other polyolefin polymers, for example, a non-
35 grafted substantially linear ethylene polymer or a conventional
polyolefin polymer (LLDPE, HDPE, PP, etc.), the blend typically

comprises from 2 to 70 wt %, preferably from 5 to 30 wt %, of the graft-modified substantially linear ethylene polymer. Wire and cable are end use applications for such polymer blends. The presence of the graft-modified substantially linear ethylene polymer in these blends, both for engineered materials and wire and cable, provides improved impact and/or strength properties to the compositions.

In other embodiments, the graft-modified substantially linear ethylene polymer comprises from a relatively minor amount (for example, 10 wt %), up to a substantial majority, for example, 90 wt %, of the finished article. In those applications in which the paintability of the finished article is of importance, incorporation from 30 to 70 wt % of a graft-modified substantially linear ethylene polymer will impart desirable paintability properties to an otherwise unpaintable molded article, for example, an article prepared from a polyolefin such as polyethylene and polypropylene.

In another application, the grafted substantially linear ethylene polymer is made into a film comprising up to 100 wt % of the graft-modified substantially linear ethylene polymer. Such films exhibit desirable adhesive properties, and are useful as tie layers in various packaging applications, for example, tying another polyolefin to polypropylene, polyester, polyamide, EVOH, paperboard, foil, etc. These laminated or coextruded structures have utility as lidding stock, pouches for liquid foods, bag and box packaging structures, and barrier packaging films.

As noted above, the polymer blends in which the graft-modified substantially linear ethylene polymer is incorporated can include other additives, such as fillers, colorants, antioxidants, antistats, slip agents, tackifiers, and fragrances. These additives are incorporated by known methods in known amounts.

In another embodiment of this invention, the grafted substantially linear ethylene polymer is "let-down" or diluted with virgin substantially linear ethylene polyolefin or another grafted substantially linear ethylene polymer prior to mixing it with a blending polymer. For example, after the grafted substantially linear ethylene polymer has been prepared as described in USP 4,950,541, it is then back-blended in an extruder with virgin substantially linear

ethylene polymer to a predetermined dilution. Let-down or dilution ratios will vary with the ultimate application of the grafted substantially linear ethylene polymer, but weight ratios from 1:10 to 10:1 are typical.

5 The grafted substantially linear ethylene polymers used in the practice of this invention, and the compositions comprising these polymers, are more fully described in the following examples. Unless indicated to the contrary, the substantially linear ethylenes used in the examples are prepared in accordance with the techniques set forth
10 in USP 5,272,236 via a solution polymerization process utilizing a $[(\text{CH}_3)_4\text{C}_5]-(\text{CH}_3)_2\text{Si}-\text{N}-(\text{t}-\text{C}_4\text{H}_9)]\text{Ti}(\text{CH}_3)_2$ organometallic catalyst activated with tris(perfluorophenyl)borane. Unless indicated to the contrary, all parts and percentages are by weight, total weight basis. Unless indicated to the contrary, the following test procedures are
15 utilized:

15	1. Notched IZOD Impact (ft-lb/in)	ASTM D-256 (at 23 C, 0 C, -18 C, -29 C and -40 C)
20	2. Tensile (psi)	ASTM D-638
	3. Yield (psi)	ASTM D-638
	4. Elongation (%)	ASTM D-638
	5. Whiteness Index (WI)	ASTM E-313
25	6. Yellowness Index (YI)	ASTM E-313
	7. Particle Size (microns)	Electron micrographs of microtomed molded test samples
30	8. Dynatup	ASTM D-3763-86 (at -29C)

SPECIFIC EMBODIMENTS

Sample Preparation

35 All samples were prepared by feeding polymer as described in Table 1 into a Werner-Pfleiderer ZSK-53/5L co-rotating twin screw extruder operated at the conditions described in Table 2. After the polymer was fed into the extruder, a mixture of maleic anhydride (MAH)/methyl ethyl ketone (MEK)/LUPERSOL 130 (Initiator) at a weight
40 ratio of 1:1:0.032, respectively, was fed into the end of Zone 1 of the extruder through an injection nozzle by a metering pump. LUPERSOL 130 is 2,5-di(t-butyl peroxy)hexyne-3 manufactured and sold by Atochem. The extruder was maintained at a vacuum level of greater

than or equal to 26 inches of mercury (88 kPa) to facilitate devolatilization of solvent, unreacted MAH and other contaminants. The percent of incorporation of MAH into each polymer is also reported in Table 1. Example C1 is an ultralow density ethylene/1-octene resin manufactured and sold by The Dow Chemical Company under the tradename ATTANE. Example C2 is Dowlex® 2517 resin, a LLDPE ethylene/1-octene resin manufactured and sold by The Dow Chemical Company. Example C3 is Tafmer® P-0180 resin, an ethylene/propylene copolymer resin manufactured and sold by Mitsui Petrochemical. Examples C1, C2 and C3 are comparative examples. The resin used in Examples 1-4 was a substantially linear ethylene polymer of ethylene and 1-octene.

TABLE I
Incorporation of Maleic Anhydride into
Conventional and Substantially Linear Ethylene
Polymers

Example	Melt Index* (I ₂)	Density* (g/cm ³)	Melt Flow Ratio* I ₁₀ /I ₂	% Incorporation
C1	3.4	0.906	7.65	40.2
C2	25.0	0.917	-	25.3
C3	5.0	0.870	5.91	48.9
1	7.0	0.903	7.57	68.9
2	5.0	0.871	7.66	57.3
3	0.75	0.870	7.58	62.3
4	25.0	0.870	-	30.6

*Ungrafted polymer

TABLE 2
Extruder Operation Conditions

Barrel Temp (C)	C1	C2	C3	1	2	3	4
Zone 1	164	156	177	142	140	150	162
Zone 2	191	193	200	176	186	195	154
Zone 3	201	198	202	195	206	198	203
Zone 4	236	206	200	180	192	221	207
Polymer Melt Temp (C)	177	162	162	173	162	163	N/A*
Screw Speed (rpm)	300	300	320	320	255	300	320
Polymer Feed Rate (lb per hr/ kg per hr)	150/ 68.2	150/ 68.2	135/ 61.4	150/ 68.2	130/ 59.1	135/ 61.4	135/ 61.4
MAH/MEK/ Initiator Feed Rate (lb per hr/ kg per hr)	6.45/ 2.93	5.92/ 2.69	5.96/ 2.71	5.57/ 2.53	5.90/ 2.68	5.84 / 2.65	5.46 / 2.48

5

* N/A = Not Available

The data of Table 1 show that the grafting of a substantially linear ethylene polymer is more efficient than the grafting of a non-substantially linear ethylene polymer having similar physical properties of melt index, density, and melt flow ratio. The polymer of Example 1 is a substantially linear ethylene polymer with a melt index of 7.0 g/10 min and a density of 0.903 g/cm³, with 68.9% of the MAH being incorporated into it. In comparison, the polymer of Comparative Example 1 is a non-substantially linear ethylene polymer (ULDPE) with a melt index of 3.4 g/10 min and a density of 0.906

10

15

g/cm³, which incorporated only 40.2% of the MAH under similar conditions. The substantially linear ethylene polymer incorporated 70% more MAH under similar conditions than did the comparative non-substantially linear ethylene polymer. These results mean that the graft-modified substantially linear ethylene polymers of this invention can be prepared with lower loss of materials (that is lower levels of MAH required to obtain the same level of grafting as for non-substantially linear ethylene polymers), and lower emissions due to the use of less volatiles.

10 Adhesive Properties

The adhesive properties of the grafted polymer samples of Comparative Example 1 and Example 1 were determined by heat seal lamination. The graft-modified polymers were fabricated into blown film having a thickness of 0.003 inches (0.008 cm). Film test samples, one inch (2.5 cm) in width, were cut from the blown film and heat sealed to polypropylene (PF-101, available from Pacur, Inc.), polyamide (Nylon 6, available from Capron-Allied Co.), ethylene/vinyl alcohol (Soranol™ D, available from Nippon Chemical Co.), polycarbonate (Lexan™, available from General Electric Plastics) and polyetherimide (Altem™, available from General Electric Plastics) films at selected temperatures. The heat seal conditions were 40 lb/in² (280 kPa) of pressure applied for 0.5 seconds by means of heated seal bars set at the desired temperature. The strength of the heat seals was determined on an Instron tensionmeter apparatus using a 180 degree ("T") pull at a crosshead speed of 2 in/min (5 cm/min). The data from these tests are reported in Table 3.

TABLE 3
Heat Seal Comparisons

SUBSTRATE	TEMPERATURE (C)	C1 FILM HEAT SEAL STRENGTH (lb. per in/kg per cm)	EX. 1 FILM HEAT SEAL STRENGTH (lb per in/kg per cm)
Polypropylene	130	0	0
	140	0	0
	150	0.1/0.1	0.4/0.3
	160	0.3/0.3	1.1/0.95
	170	1.8/1.6	2.6/2.3
	180	2.0/1.7	2.82/4
Polyamide	130	0.6/0.5	1.0/0.87
	140	0.6/0.5	1.0/0.87
	150	1.0/0.87	1.5/1.3
	160	1.5/1.3	1.5/1.3
	170	2.0/4.3	2.14.5
	180	2.2/4.8	film failure
Ethylene/vinyl alcohol	130	1.3/2.8	1.0/0.87
	140	1.3/2.8	1.0/0.87
	150	1.3/2.8	1.2/2.6
	160	1.6/3.5	1.5/2.6
	170	2.0/4.3	2.0/4.3
	180	2.5/4.8	2.3/5.0
Polycarbonate	230	0.2/0.4	1.5/2.6
Polyetherimide	230	1.0/0.87	0.8/1.7

5. The film test samples of Example 1 gave improved adhesion to polypropylene, polyamide and polycarbonate substrates, as well as similar adhesion to EVOH and polyetherimide, as compared to the film test samples of Comparative Example 1. Additional improvements in the adhesive properties of the graft-modified substantially linear
- 10 ethylene polymers can be realized with respect to changes in resin density and fabrication techniques, for example, extrusion lamination

or multilayer extrusion. Improvement can also be obtained in the adhesive properties of such blends by using a grafted substantially linear ethylene polymer that has been back-blended or let-down with an ungrafted substantially linear ethylene polymer.

5 Impact Properties

The use of graft-modified substantially linear ethylene polymers to improve the impact properties of various polymer blends was evaluated by incorporating the polymer into a polyamide resin (CAPRON 8207, manufactured and sold by Allied-Signal). Melt blends of the polyamide with 0, 10 and 25 wt % of the graft-modified substantially linear ethylene polymer were prepared on an extruder prior to molding on an injection molding machine. The injection molded test samples (IZOD specimens) were evaluated for room temperature notched IZOD impact performance. The formulations and results are reported in Table 4.

TABLE 4
IZOD Impact Comparisons

BLEND COMPOSITION		IZOD IMPACT (ft-lb per in/ J per cm)
POLYAMIDE (WT %)	MODIFIER (WT %)	
Polyamide (100%)	None	1.3/0.69
Polyamide (90%)	C1 (10%)	2.7/1.4
Polyamide (75%)	C1 (25%)	15.4/8.22
Polyamide (90%)	Ex. 1 (10%)	4.0/2.1
Polyamide (75%)	Ex. 1 (25%)	16.1/8.59

20 As is evident from the data in this Table, polyamide blends containing the graft-modified substantially linear ethylene polymer have higher IZOD impact performance as compared to blends containing a similar graft-modified ULDPE, that is, Comparative Example 1. Additional improvements can be realized by lowering in the polymer density.

25

Compatibilization Properties

These properties were evaluated by blending the graft-modified substantially linear ethylene polymer of Example One with a base

composition containing an unmodified substantially linear ethylene polymer (1 g/10 min MI, 0.902 g/cm³ density), an inorganic filler (240 parts per hundred resin (phr) vinyl silane treated aluminum trihydrate), peroxide (5 phr Vulcup 40 KE available from Hercules Inc.), coagent (0.8 phr TAC - triallyl cyanurate, available from Union Carbide), and a hydrocarbon oil (80 phr Sunpar 2280 available from Sun Oil Company). Melt blends containing 0, 5 and 10 parts of the graft-modified substantially linear ethylene polymer phr and 100, 95, and 90 parts ungrafted base resin were prepared on a small Banbury internal mixer. The blended samples were compression molded and evaluated for tensile strength properties before and after curing. The curing conditions were 1 minute at 400 F (204 C). The tensile strength properties for these blends are reported in Table 5.

TABLE 5

Tensile Strength Properties

Sample	Ungrafted Base Resin (phr)	Ex 1 Level (phr)	Tensile Strength	
			Uncured (psi/kPa)	Cured (psi/kPa)
A	100	0	709/4890	1243/8570
B	95	5	109777564	1486/10,250
C	90	10	1223/8432	1421/9797

As shown by the data in this Table, the incorporation of graft-modified substantially linear ethylene polymer into these compositions allows for compatibilization of an inorganic filler with a resin matrix resulting in higher tensile strength properties. In addition, higher tensile strength properties are obtained both before and after curing.

Processibility

The processibility of the graft-modified substantially linear ethylene polymers as compared to graft-modified non-substantially linear ethylene polymers was determined from the reduced melt

viscosity vs. shear rate data obtained from capillary rheology evaluations at 190 C. In order to obtain these data, the apparent melt viscosity (poise) vs. apparent shear rate (1/seconds) data was generated according to the ASTM D-3835 method. The reduced melt viscosity data were calculated by dividing the melt viscosity (n) obtained at each shear rate by the melt viscosity (n*) measured at the lowest possible shear rate. For the condition used in these determinations, the lowest shear rate corresponds to 2.96 seconds⁻¹. An example of these reduced melt viscosity calculations are illustrated below.

Capillary Rheology Data

Apparent Melt Viscosity at 2.96 seconds⁻¹ = 74,800 poise (7480 Pa·s) (n*)

Apparent Melt Viscosity at 7.40 seconds⁻¹ = 46,400 (4640 Pa·s) poise (n)

Reduced Melt Viscosity at 2.96 seconds⁻¹ = 1.000 (n*/n*)

Reduced Melt Viscosity at 7.40 seconds⁻¹ = 0.620 (n/n*)

These reduced melt viscosity data are calculated from the lowest (2.96 seconds⁻¹) to the highest shear rate (2960 seconds⁻¹) obtained from the capillary rheology evaluations. These reduced melt viscosity data are reported in Table 6 for Comparative Examples 1 and 3 and Examples 1 and 2.

TABLE 6
Reduced Melt Viscosity Data

Apparent Shear Rate (second ⁻¹)	Reduced Melt Viscosity (x 10 ³)			
	C1	C3	1	2
2.96	1000	1000	1000	1000
7.40	620	610	600	600
14.80	450	450	430	420
29.60	330	330	300	295
74.00	220	220	190	185
148.00	150	150	130	125
296.00	110	90	90	85
740.00	60	58	51	48
1480.00	37	N/A	31	29
2960.00	22	N/A	19	18

5

N/A = Not Available

10 The data in Table 6 illustrates the effect of shear rate on melt viscosity (that is, reduced) for Comparative Example 1 vs. Example 1, and Comparative Example 3 vs. Example 2. These data shows that the compositions of this invention have significantly lower melt viscosities as compared to the noninventive compositions at a variety of shear rates.

15 The percent difference between the reduced melt viscosity values for Example 1 and Comparative Example 1 were calculated at each corresponding shear rate. This data is reported in Table 7.

TABLE 7
 Calculated Percent Difference in
Reduced Melt Viscosity (Ex 1 versus C1)

Apparent Shear Rate (seconds ⁻¹)	Percent Difference* in Reduced Melt Viscosity
2.96	0.0
7.40	3.3
14.80	4.7
29.60	10.0
74.00	15.8
148.00	15.4
296.00	22.0
740.00	17.6
1480.00	19.4
2960.00	15.8

5

*Percent Difference Calculation (at 7.40 seconds⁻¹)

$$\frac{(620-600)}{600} \times 100 = 3.3\%$$

600

10

The percent difference data in Table 7 show that the graft-modified substantially linear ethylene polymers of this invention afford processability advantages over the graft-modified non-substantially linear ethylene polymers (the lower the melt viscosity at a given shear rate, generally the better the processability of the polymer). Moreover, the magnitude of these differences increases with shear rate. The benefit of lower melt viscosities is improved extrusion processability, that is, lower extrudate energy consumption, nonsurging, and smoother extrudate.

15

20

Impact Properties of Certain Blends Containing Graft-modified Substantially Linear Ethylene Polymer

The following materials were used in this test:

ADMER QF 500A, a polypropylene grafted with 1.5 wt % MAH and manufactured and sold by Mitsui Petrochemical; the grafted polymer had a melt index of 3.0 g/10 min at 230 C and a density of 0.900 g/cm³.

Primacor® 3460, a copolymer of ethylene and acrylic acid manufactured and sold by The Dow Chemical Company; this material contained 9.7 wt % acrylic acid monomer and had a melt index of 20 g/10 min.

5 Graft-modified substantially linear ethylene polymer; ENGAGE™ EG8200 polyolefin elastomer made by The Dow Chemical Company, as grafted with 1.3 weight percent maleic anhydride. The graft modified material had a melt index of 0.25 g/10 min and a density of 0.870 g/cm³.

10 Profax® 6524, a polypropylene manufactured and sold by Himont; it had a melt index of 4 g/10 min at 230 C and a density of 0.9 g/cm³.

The graft-modified substantially linear ethylene polymer (referred to below as Insite™ Technology Polymer or ITP) was prepared according to the procedure described in USP 4,950,541. The polymer components were dry mixed at a certain weight ratio (as reported in Table 8), and were then fed into a Werner-Pfleiderer ZSK-30 twin-screw extruder operated at about 210 C. The blends were made in one extrusion pass.

TABLE 8

Composition of Testing Samples

Sample	Graft-Modified Polypropylene (Admer® QF 500A)	Polypropylene (Profax® 6524)	Graft-Modified Substantially Linear Ethylene-Polymer (ITP)	EAA (Primacor®)
C4	100	---	---	---
C5	50	---	---	50
5	--	---	50	50
6	50	---	50	---
7	50	---	20	30
8	---	50	20	30

25 Injection molded samples were prepared using a 50 ton (45 tonne) Negri-Bossi Injection Molder operated with a barrel temperature between 200 and 250 C, a barrel pressure of 40 bars (4 MPa), cooling mold temperature of 85 F (29 C), and a residence time in the cooling

mold of about 12 seconds. The samples were formed into 2.5" x 6.5" x 0.075" (5 cm x 17 cm x 0.19 cm) plaques.

The flex modulus and IZOD impact properties (at room temperature and -30 C) were measured for each of the samples in Table 8. These properties are important in many applications, for example, automobile parts. The properties were measured according to ASTM D-790 and D-256, respectively, and the results are reported in Table 9. Samples 6 and 7 exhibit very good low temperature impact properties, the result of the presence of the graft-modified substantially linear ethylene polymer.

TABLE 9

Impact Properties and Flex Modulus

Sample	Flex Modulus (kpsi/Pa)	IZOD at Room Temp (ft-lb per in/J per cm)	IZOD at -30 C (ft-lb per in / J per cm)
C4	135/9.31 x 10 ⁵	8.3/4.4	0.55/0.29
C5	---	2.76/1/47	0.52/0.28
5	8/5.5 x 10 ⁴	3.51/1.87	1.07/0.57
6	39/2.7 x 10 ⁵	6.2/3.3	12.1/6.46
7	56/3.9 x 10 ⁵	6.55/3.49	5.82/3.11
8	70/4.8 x 10 ⁵	9.09/4.85	0.84/0.45

15 Comparison of Impact and Other Properties of Specimens Made by Injection Molding of Blends of Polyester and Graft-Modified Substantially Linear Ethylene Polymer

20 A blend containing 20% by wt substantially linear ethylene/1-octene polymer (ITP) grafted with about 1% maleic anhydride and 80% by wt polybutylene terephthalate (PBT) was compounded on a Welding Engineers counter-rotating twin screw extruder operated at 200 rpm using the temperature profile reported in Table 10.

TABLE 10

Zone	Barrel Temp (C)
1 (feed)	240
2	250
3	250
4	260
5	260
6	260
7	260
die	250

5 The ITP was prepared according to the methods taught in USP 5,272,236 and USP 5,278,272, and it was grafted with maleic anhydride as described in the Sample Preparation section above. Certain physical properties of these polymers are reported in Table 11 below. The PBT was Celenex® 2002 manufactured and sold by Hoechst Celanese Corporation. This polyester had a density of 1.31 g/cm³ and a melt flow of 10 g/10 min (250 C, 2160 g). The Tafmer resin was the same as 10 that used in Example C3 above, and it was grafted with maleic anhydride in the same manner as was the ITP.

TABLE 11

Description of ITP and MAH-g-ITP Resins

15

Property	ITP	MAH-g-ITP
Melt Flow (g/10 min, I ₂ @ 190 C)	1.0	0.45
Melt Flow (g/10 min, I ₁₀ @ 190 C)	7.42	5.22
I ₁₀ /I ₂ Ratio	7.42	11.6
Density (g/cm ³)	0.87	0.87
M _w /M _n	1.86	2.32
Maleic Anhydride (wt %)	----	0.95

The resulting blend strand was cooled by means of a water bath and pelletized using a chopper. The pellets were dried under vacuum and test specimens were injection molded on a Boy 30 ton (27 tonne) injection molder under the conditions reported in Table 12.

5

TABLE 12

Boy Injection Molder	Operating Condition
Zone 1	250 C
Zone 2	260 C
Zone 3	260 C
nozzle	260 C
injection pressure	35-50 bar (3.5-5 MPa)
mold temperature	70 C
cycle time	20 sec

10

The molder produced tensile and impact specimens which were tested using ASTM procedures. For purposes of comparison, specimens were also prepared from PBT, and an un-grafted ITP/PBT 20/80 blend. The results of various physical property evaluations are reported in Table 13.

TABLE 13

15

Property	PBT	PBT/ITP	PBT/MAH-g-ITP
Weight % ITP	0	20	20
Yield Tensile (psi/kPa)	8100/ 55850	4800/ 33090	5200/ 35850
Break Tensile (psi/kPa)	5800/ 39990	3300/ 22750	1800/ 12410
Elongation (%)	123	15	25
Notched Izod (ft-lb per in/J per cm)	1.2/0.64	1.5/0.80	12.1/6.46
-30 C Dynatup (ft-lb/J)	29.1/39.5	1.0/1.4	62.2/84.3

As can be seen in the reported impact data, the blends containing MAH-g-ITP demonstrate improved impact properties at ambient temperature and at -30 C.

The notched IZOD impact energy was measured according to ASTM D-256 for the PBT, a 20/80 wt % blend of ITP/PBT, a 20/80 wt % blend of MAH-g-EPR/PBT, a 20/80 wt % blend of MAH-g-EPDM/PBT, a 20/80 wt % blend of MAH-g-ITP/PBT, a 10/10/80 wt % blend of ITP/MAH-g-ITP/PBT, and a 20/80 wt % blend of MAH-g-Tafmer/PBT. The measurements were made under ambient conditions, and the results are reported in Figure 1. The description of the MAH-g-EPDM, MAH-g-EPR, and MAH-g-Tafmer, as well as their notched IZOD impact energy, are reported in Table 14.

TABLE 14
Description of Comparative Resins

Property	MAH-g-EPDM ¹	MAH-g-EPR ²	MAH-g-Tafmer ³
Melt Flow (g/10 min) (I ₂ @ 190 C)	0.04	0.08	0.34
Melt Flow (g/10 min) I ₁₀ @ 190 C)	0.71	1.64	4.71
I ₁₀ /I ₂ Ratio	17.7	20.5	13.8
Density (g/cm ³)	0.87	0.87	0.87
Maleic Anhydride (wt %)	0.50	0.70	1.1
Notched IZOD (J/cm)	0.75	1.1	1.5

¹Ethylene-propylene diene elastomer functionalized with maleic anhydride and sold by Uniroyal Chemical (Product designated - ROYALTUF 465A).

²Ethylene-propylene elastomer functionalized with maleic anhydride and sold by Exxon Chemical (Product designated -Exxelor VA 1801).

³An ethylene-propylene elastomer (Tafmer P-0180 from Mitsui) graft modified with maleic anhydride as described above.

As can be seen from the results reported in Tables 13 and 14, the notched IZOD impact energy of the PBT blends of this invention incorporating 20 weight of the MAH-grafted ITP are markedly greater

than the comparative resins.

Figure 1 reports the notched IZOD impact energy under ambient conditions of several compositions in which the amount of elastomer in the PBT was varied. As reported, compositions containing MAH-g-ITP display a greater impact energy over a wide array of concentrations, and a decidedly greater impact energy when the concentration of the elastomer is in excess of 15 wt % of the composition.

Figure 2 reports status similar to Figure 1 except the impact energy is measured on a Dynatup at -20 F (-29 C) using ASTM D-3763-86. At this low temperature, the composition containing MAH-g-ITP has markedly improved impact resistance over the entire range of reported concentrations.

Figure 3 reports the effect of varying amounts of MAH-g-ITP and MAH-g-Tafmer in PBT and as evidenced by this report, concentrations of either in excess of 15 wt % increase notched IZOD impact energy of the blend, with the blend containing MAH-g-ITP exhibiting superior impact energy as between the two blends.

Polyamide-Polyolefin Compositions

Substantially homogeneous polyamide-polyolefin compositions were prepared using the polyolefins reported in Table 15 and the polyamides reported in Table 16. The polyamides were predried in an oven at 70 C for 24 hours.

TABLE 15
Polyolefin Resins

Description/Grade	Melt Flow I ₂ @ 190 C	Density (g/cm ³)	MAH (wt %)
1. MAH-g-EPDM is an ethylene/proplene/diene elastomer functionalized with maleic anhydride and sold by Uniroyal Chemical (ROYALTUF 465A).	0.04	0.87	0.5
2. MAH-g-EPR is an ethylene/propylene elastomer modified with maleic anhydride and sold by Exxon Chemical (Exxelor VA 1801).	0.08	0.87	0.7
3. MAH-g-ITP(1) is a substantially linear, homogeneous ethylene/1-octene polymer graft-modified with maleic anhydride.	0.45	0.87	0.95
4. MAH-g-ITP(2) is a substantially linear, homogeneous ethylene/1-octene polymer graft-modified with maleic anhydride.	0.46	0.91	1.3
5. ITP(A) is a substantially linear, homogeneous ethylene/1-octene polymer.	5.0	0.87	N/A
6. ITP(B) is a substantially linear, homogeneous ethylene/1-octene polymer.	1.0	0.87	N/A

5

MAH - maleic anhydride

N/A - not applicable

TABLE 16
Typical Properties for Polyamide Resins
 (dry as molded)

5

DESCRIPTION/ GRADE	TENSILE (PSI/ /kPa)	YIELD (PSI/ kPa)	ELONGATION (%)	NOTCHED IZOD RT-(ft-lb per in./J per cm)
Nylon 1000-1 is a low M_w Nylon 6,6 from Hoechst-Celanese used for injection molding	12,000/ 83,000	12,000/ 83,000	40-80	1.0/0.53
Nylon 1200-1 is a high M_w Nylon 6,6 from Hoechst-Celanese used for extrusion	12,400/ 85,000	---	75	1.3/0.69

RT - room temperature

10 The blend compositions reported in Table 17 were prepared by weighing the dried polyamide and polyolefin resins at the indicated proportions. Each of these dry blends were then melt blended on a 30 mm Werner-Pfleiderer twin screw extruder. The extruder melt temperatures were between 260 and 270 C. Each melt blended sample was pelletized and subsequently dried in a vacuum oven at 70 C for 24

15 The dried melt blended samples were injection molded on a 55 ton (50 tonne) Neggi Bossi injection molder. An ASTM mold was used to obtain the injection molded test samples (that is tensile and IZOD bars). The injection molding temperatures were between 240 and 260 C. The ASTM mold temperature was set at 70 C. The molded test samples

20 were equilibrated at 50% relative humidity, and then were tested.

TABLE 17
Blended Compositions

Blend #	% Nylon 6,6 & Grade (by wt.)	% Polyolefin & Grade (by wt.)
Comparative 1	80% of 1000-1 (low M _w)	20% of MAH-g-EPR
Comparative 2	80% of 1000-1 (low M _w)	20% of MAH-g-EPDM
Comparative 3	80% of 1200-1 (high M _w)	20% of MAH-g-EPR
Comparative 4	80% of 1200-1 (high M _w)	20% of MAH-g-EPDM
Example 1	80% of 1000-1 (low M _w)	20% of MAH-g-ITP(1)
Example 2	80% of 1000-1 (low M _w)	20% of MAH-g-ITP(2)
Example 3	80% of 1200-1 (high M _w)	20% of MAH-g-ITP(1)
Example 4	80% of 1200-1 (high M _w)	20% of MAH-g-ITP(2)
Example 5	80% of 1000-1 (low M _w)	10% of MAH-g-ITP(1)
Example 6	80% of 1000-1 (low M _w)	plus 10% ITP(A) 10% of MAH-g-ITP(1) plus 10% ITP(B)
Example 7	65% of 1000-1 (low M _w)	35% of MAH-g-ITP(1)
Example 8	65% of 1000-1 (low M _w)	35% of MAH-g-ITP(2)

- 5 The test data obtained on the injection molded blend samples prepared from low molecular weight polyamide (that is Nylon 1000-1) and high molecular weight polyamide (that is Nylon 1200-1) resins are shown in Tables 18 and 19, respectively.

TABLE 18
Test Data for Low M_w Blend Compositions

Blend #	Notched IZOD (ft-lb per in / J per cm)								Yield (psi/ kPa)	Elong (%)	WI	VI
	23 C	0 C	-18 C	-29 C	-40 C	Tensile (psi/ kPa)	Yield (psi/ kPa)	Elong (%)				
Comp 1	17.7/ 9.44	5.6/ 2.99	3.4/ 1.8	2.3/ 1.2	2.6/ 11.4	6230/ 42950	6420/ 44260	66.5	24.6	14.9		
	14.1/ 7.53	5.2/ 2.8	3.1/ 1.7	2.6/ 1.4	2.4/ 1.3	6070/ 41850	6580/ 45370	57.6	<1.0	27.2		
Ex. 1	26.7/ 14.2	19.9/ 10.6	6.8/ 3.6	4.7/ 2.5	3.8/ 2.0	7180/ 49500	6980/ 48130	117.1	29.0	12.7		
	23.6/ 12.6	8.5/ 4.5	3.1/ 1.6	2.7/ 1.4	2.4/ 11.3	7210/ 49710	7390/ 50950	98.9	36.8	7.2		
Ex. 5	19.5/ 10.4	15.7/ 8.38	3.5/ 1.9	3.4/ 1.8	2.6/ 1.4	6370/ 43920	6750/ 46540	53.4	30.1	13.6		
	20.1/ 10.7	16.5/ 8.81	4.3/ 2.3	3.6/ 1.9	3.0/ 1.6	6490/ 44800	6790/ 46820	64.0	34.6	12.0		
Ex. 7	18.3/ 9.77	19.0/ 10.1	19.3/ 10.3	6.6/ 3.5	4.7/ 2.5	6370/ 44750	6753/ 46560	53.4	--	--		
	22.1/ 11.8	20.0/ 10.7	7.7/ 4.1	4.5/ 2.4	3.7/ 2.0	6500/ 44820	6792/4 6830	64.0	--	--		
Nylon 1000-1 (control)	1.1/ 0.59	--- ---	0.8/ 0.4	1.0/ 0.53	0.9/ 0.5	12000/ 82740	12000/ 82740	40-80	41.2	<1.0		

TABLE 19
 Test Data for High M_w Polyamide Blend Compositions

Blend #	Notched IzOD (ft-lb per in/J per cm)							Tensile (psi/kPa)	Yield (psi/kPa)	Elong. (%)
	23 C	0 C	-18 C	-29 C	-40 C					
Comp. 3	21.7/	17.8/	5.2/	3.1/	2.8/	7070/	7160/	95.7		
	11.6	9.50	2.8	1.7	1.5	48750	49370			
Comp. 4	18.9/	16.5/	4.9/	3.3/	2.7/	6560/	7030/	59.6		
	10.0	8.81	2.6	1.8	1.4	45230	48470			
Ex. 3	22.2/	20./	15.4/	4.6/	3.1/	7720/	7280/	124.1		
	11.8	10.9	8.22	2.5	1.7	53230	50190			
Ex. 4	20.9/	15.3/	4.3/	2.8/	2.5/	8570/	7670/	174.2		
	11.2	8.17	2.3	1.5	1.3	59090	52880			
Nylon 1200-1 (control)	1.3/	1.1/	1.2/	1.3/	0.9/	12400/	---	75.0		
	0.69	0.58	0.64	0.69	0.48	85490				

These IZOD impact data may be plotted as a function of temperature. From these plots, the ductile-brittle transition temperature (DBTT) value for each composition, for example, the temperature which marks the transition from ductile to brittle failure, can be calculated. A comparison of these DBTT values are reported in Tables 20 and 21.

TABLE 20
Ductile-Brittle Transition Temperature Values
for Low M_w Nylon Blends

Blend #	DBTT (C)	Dispersed Particle Size (microns)		
		Min.	Max.	Avg.
Comparative 1	8	0.10	2.5	0.5
Comparative 2	5	0.17	10.0	1.0
Example 1	-12	0.05	1.3	0.3
Example 2	3	--	--	--
Example 5	- 9	--	--	--
Example 6	- 9	--	--	--
Example 7	-27	--	--	--
Example 8	-13	--	--	--

TABLE 21
Ductile-Brittle Transition Temperature Values
for High M_w Nylon Blends

Blend #	DBTT (C)	Dispersed Particle Size (microns)		
		Min.	Max.	Avg.
Comparative 3	- 11	--	--	--
Comparative 4	- 10	--	--	--
Example 3	- 26	0.05	1.0	0.1
Example 4	- 10	--	--	--

The ductile-brittle transition temperatures clearly show that the compositions which contain the maleic anhydride graft-modified substantially linear, ethylene/octene polymers have superior low temperature toughness as compared to the other compositions evaluated. These unexpected results are especially evident for the compositions which contain the maleic anhydride graft-modified substantially linear ethylene/octene polymer having a low specific gravity (that is 0.870 g/cm³). Compositions which exhibit low temperature toughness have

commercial advantages over other compositions, especially those used in outdoor applications.

5 In addition, the comparative polyolefins must have a specific value of modulus and are not effective when used in small amounts for example, less than about 25 wt %. The IZOD impact data clearly show that maleic and hydride graft-modified substantially linear, ethylene/octene polymer can effectively impact modify polyamide-polyolefin resin compositions at reduced or low concentrations. At these reduced concentrations, these novel polyamide-polyolefin resin
10 compositions exhibit the superior low temperature toughness that was previously not available. These improved properties are indicative of compositions having superior heat aging and weatherability performance.

15 Although this invention has been described in considerable detail through the preceding examples, such detail is for the purpose of illustration only and is not to be construed as a limitation upon the invention. Many variations can be made upon the preceding examples without departing from the spirit and scope of the invention as described in the following claims.

1. A composition comprising a substantially homogeneous blend of at least one thermoplastic polymer and at least one substantially linear ethylene polymer grafted with at least 0.01 wt %, based on the weight of the grafted ethylene polymer, of an unsaturated organic compound containing at least one site of ethylenic unsaturation and at least one carboxyl group, the ethylene polymer characterized as having:

- (i) a melt flow ratio, $I_{10}/I_2 \geq 5.63$;
- (ii) a molecular weight distribution, M_w/M_n , defined by the equation: $M_w/M_n \leq (I_{10}/I_2) - 4.63$;
- (iii) a density greater than 0.850 g/cm^3 ; and
- (iv) a critical shear rate at onset of surface melt fracture of at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having about the same I_2 and M_w/M_n .

2. The composition of Claim 1 in which the substantially linear ethylene polymer comprises between about 95 and 50 wt % polymerized ethylene monomer and between about 5 and 50 wt % of at least one polymerized alpha-olefin comonomer of 3 to about 20 carbon atoms.

3. The composition of Claim 2 in which the substantially linear ethylene polymer has a density between about 0.860 and about 0.935 g/cm^3 .

4. The composition of Claim 3 in which the substantially linear ethylene polymer has a melt flow ratio from about 6.5 to 15.

5. The composition of Claim 4 in which the substantially linear ethylene polymer has a melt index from about 0.5 to 200 g/10 min.

6. The composition of Claim 5 in which the substantially linear ethylene polymer has a molecular weight distribution measured by gel permeation chromatography of between about 1.8 and 2.5.

7. The composition of Claim 6 in which the substantially linear ethylene polymer is an interpolymer of ethylene and at least one comonomer selected from the group consisting of propylene, 1-butene, 1-hexene, 4-methyl-1-pentene, and 1-octene.

5

8. The composition of Claim 7 in which the substantially linear ethylene polymer is a copolymer of ethylene and 1-butene, 1-hexene, 4-methyl-1-pentene or 1-octene.

10

9. The composition of Claim 6 in which the substantially linear ethylene polymer is a copolymer of ethylene and 1-octene.

15

10. The composition of Claim 6 in which the unsaturated organic compound is selected from the group consisting of maleic, acrylic, methacrylic, itaconic, crotonic, alpha-methyl crotonic and cinnamic acids, anhydrides, esters and their metal salts, and fumaric acid and its ester and metal salts.

20

11. The composition of Claim 7 in which the unsaturated organic compound is maleic anhydride.

25

12. The composition of Claim 1 in which the grafted unsaturated organic compound is between about 0.05 and about 10 % of the weight of the grafted polymer.

30

13. The composition of Claim 1 in which the thermoplastic polymer comprises at least one of a polyurethane, polycarbonate, polystyrene, polyester, epoxy, polyamide and a polyolefin containing polar groups.

35

14. The composition of Claim 13 further comprising a nongrafted substantially linear ethylene polymer.

15. The composition of Claim 1 in which the thermoplastic polymer is a polyester.

16. The composition of Claim 1 in which the thermoplastic polymer is a polyamide.

5 17. The composition of Claim 1 in which the thermoplastic polymer is at least one of EAA, EVA, ECO, EPCO and ECOAA.

18. The composition of Claim 1 further comprising filler.

10 19. The composition of Claim 18 in which the filler is at least one of silica, talc, glass, clay, and carbon black.

FIG. 1

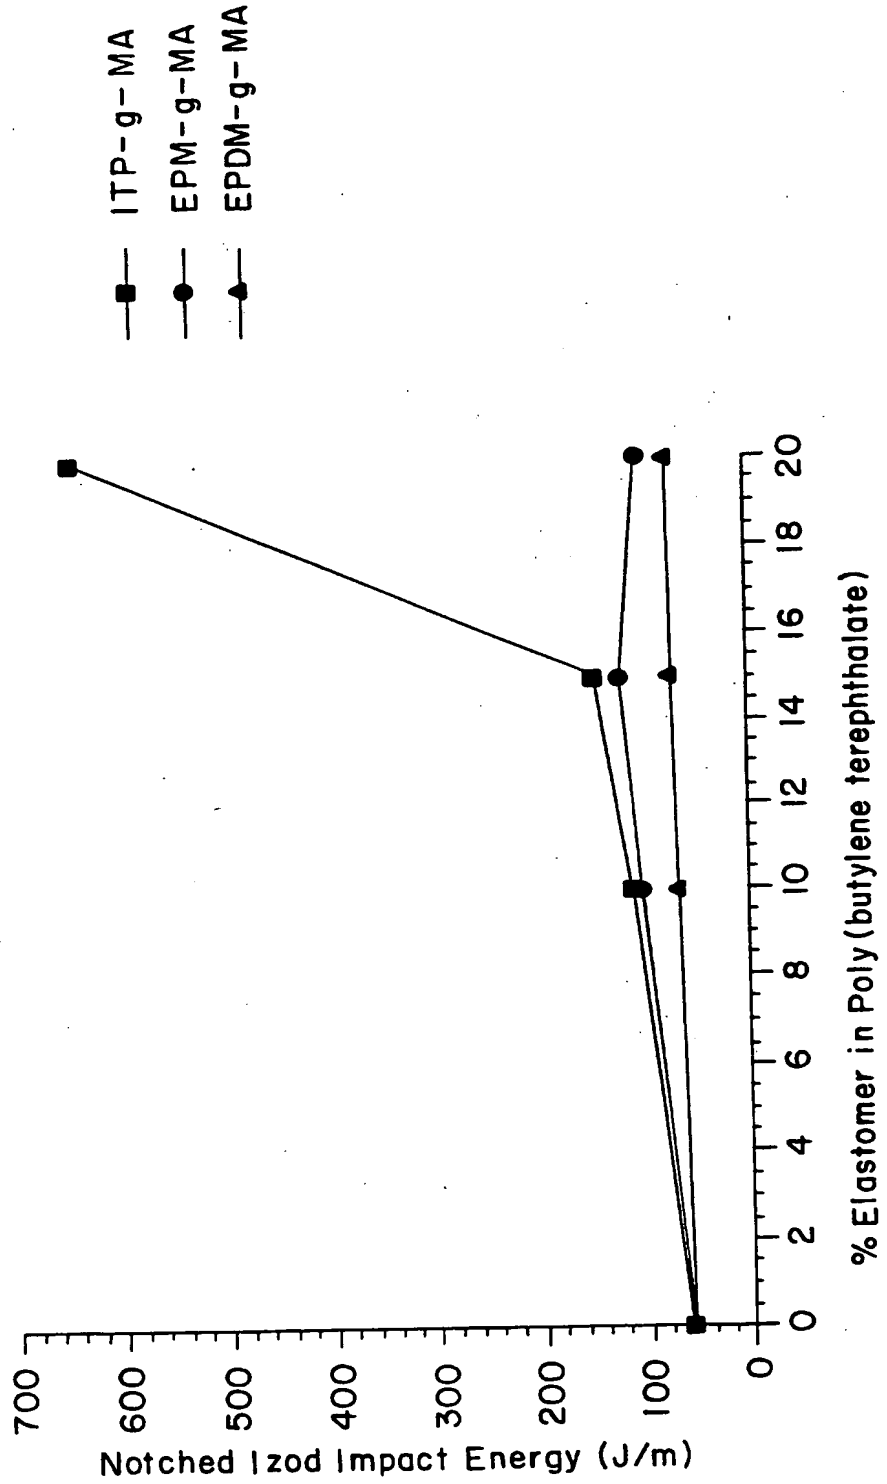


FIG. 2


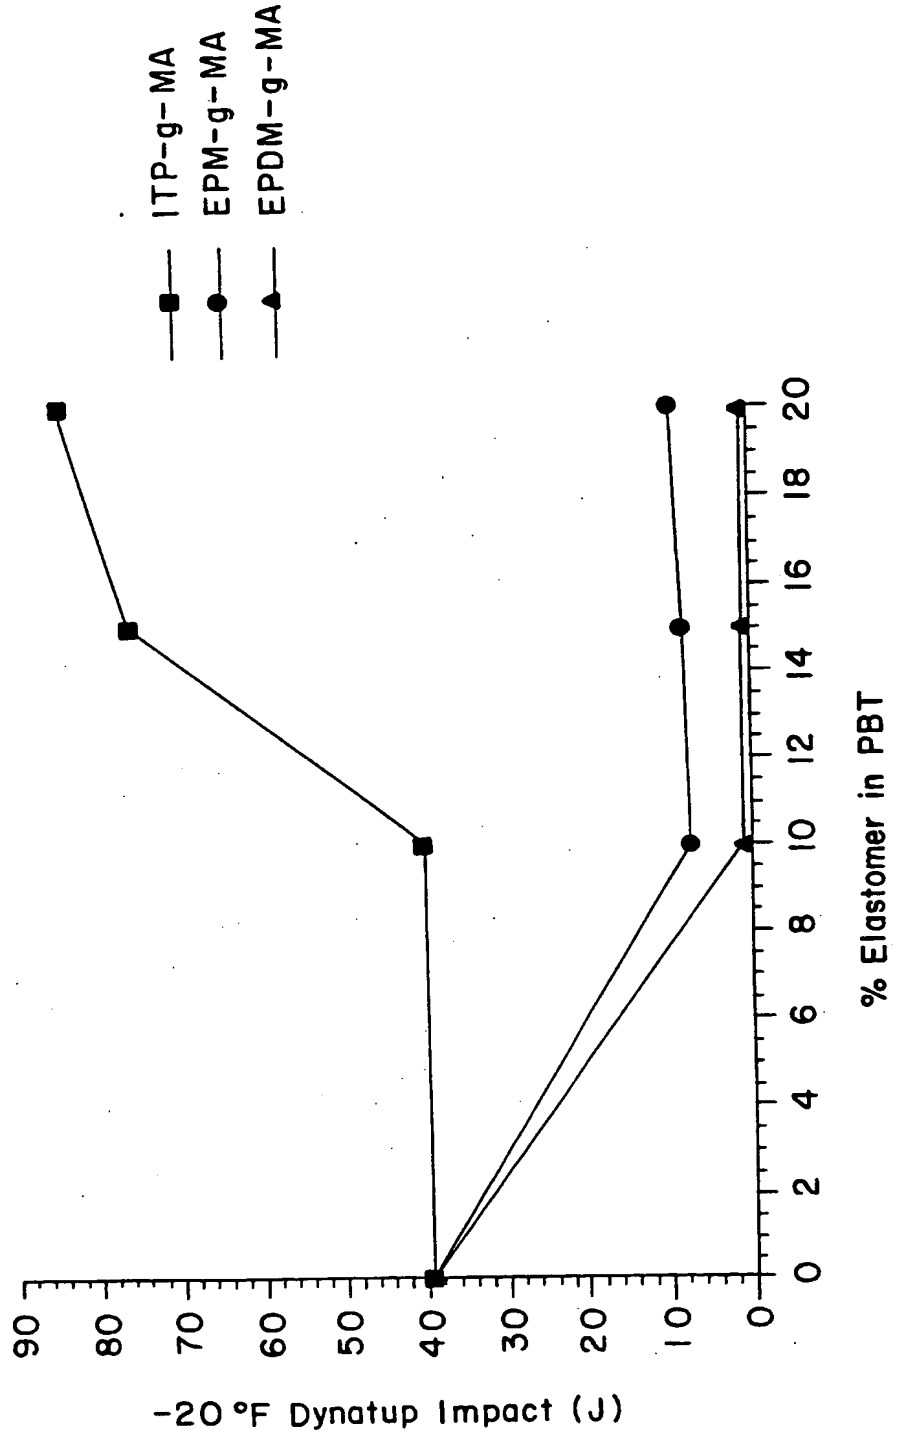


FIG. 3

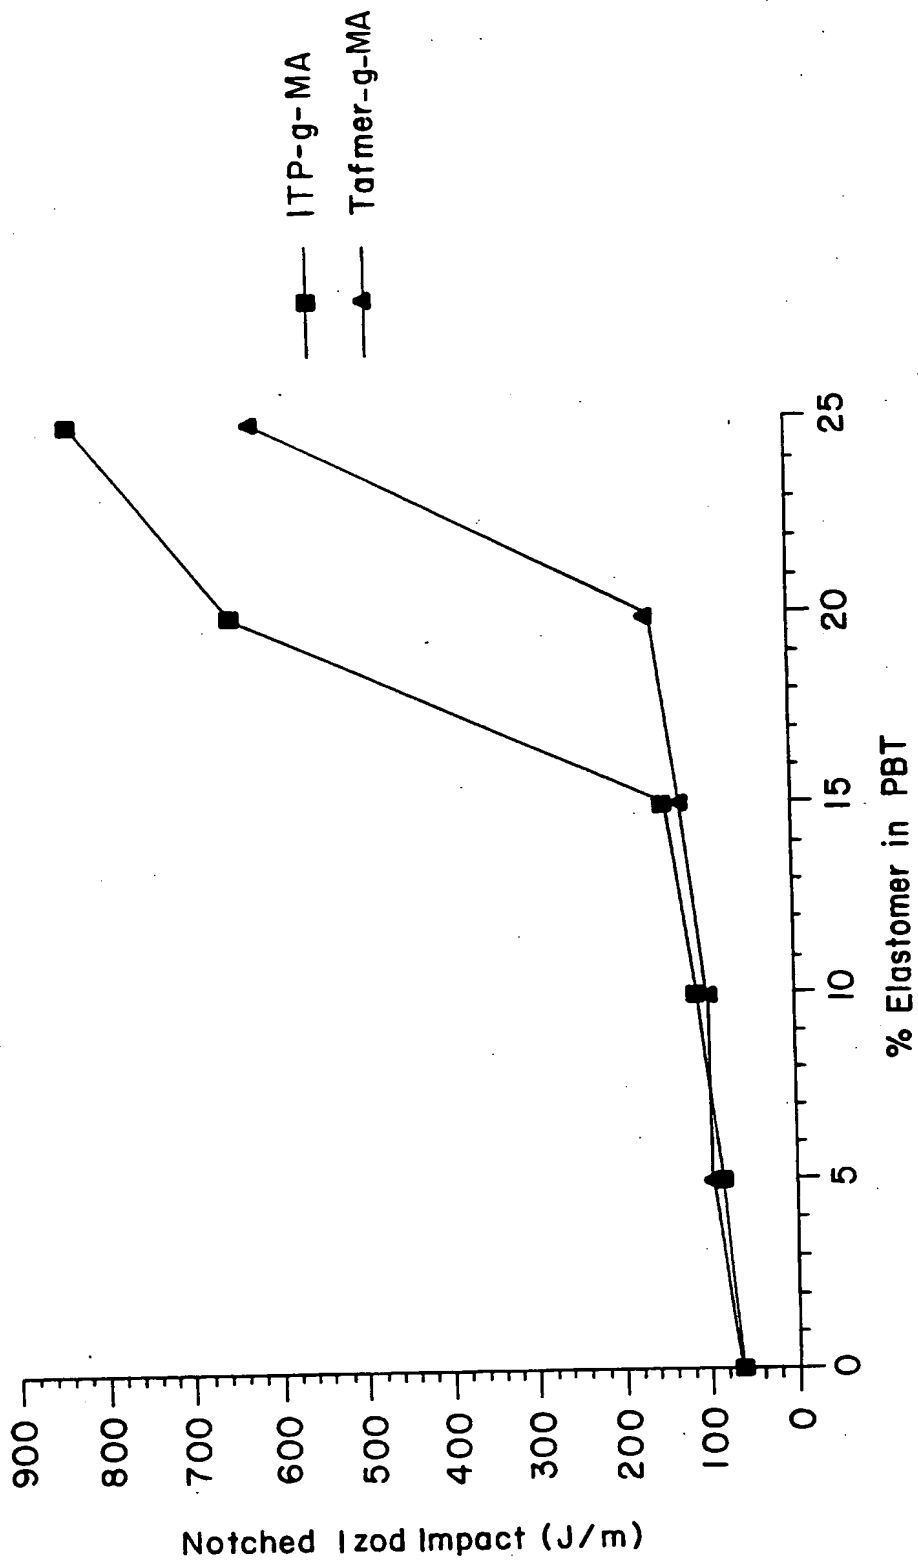

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 94/04512

A. CLASSIFICATION OF SUBJECT MATTER

C 08 L 51/06, C 08 L 23/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C 08 L, C 08 F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP, A1, 0 286 734 (STAMICARBON S.V.) 19 October 1988 (19.10.88), page 3, lines 4-33; page 4, line 21; page 5, line 12; examples; claims.	1-5, 8-19
X.Y	WO, A1, 88/03 475 (E.I. DU PONT DE NEMOURS AND COMPANY) 19 May 1988 (19.05.88), page 6, lines 1-31; page 7, line 5 - page 9, line 24; examples; claims.	1-5, 8-19
P.Y	US, A, 5 278 272 (LAI et al.) 11 January 1994 (11.01.94), column 2, lines 33-63;	1-19

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

25 July 1994

Date of mailing of the international search report

24. 08. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

TENGLER e.h.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 94/04512

-2-

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	column 3, lines 24-56; column 5, lines 26-55; examples; claims. -----	

ANHANG

zum internationalen Recherchenbericht über die internationale Patentanmeldung Nr.

ANNEX

to the International Search Report to the International Patent Application No.

ANNEXE

au rapport de recherche international relatif à la demande de brevet international n°

PCT/US 94/04512 SAE 90067

In diesem Anhang sind die Mitglieder der Patentfamilien der in obengenannten internationalen Recherchenbericht angeführten Patentedokumente angegeben. Diese Angaben dienen nur zur Unterrichtung und erfolgen ohne Gewähr.

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The Office is in no way liable for these particulars which are given merely for the purpose of information.

La présente annexe indique les membres de la famille de brevets relatifs aux documents de brevets cités dans le rapport de recherche international visée ci-dessus. Les renseignements fournis sont donnés à titre indicatif et n'engagent pas la responsabilité de l'Office.

In Recherchenbericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A1 286734	19-10-88	IN A 171050	04-07-92
		US A 5021510	04-04-91
		US A 5180788	19-01-93
		AT E 83250	15-12-92
		CN A 88102228	02-11-88
		CN B 1018458	30-09-92
		DE C0 3783031	21-01-93
		EP B1 286734	09-12-92
		JP A2 64000110	05-01-89
		WO A1 8903475	19-05-88
EP A1 289494	09-11-88		
EP TD 289494	09-03-89		
EP A4 289494	12-12-90		
JP T2 1501299	11-05-89		
US A 4973625	27-11-90		
US E 34546	15-02-94		
US A 5278272	11-01-94	FI A0 941727	14-04-94
		US A 5272236	21-12-93
		WO A2 9308221	29-04-93
		WO A3 9308221	05-08-93